

# UltraDish<sup>™</sup> TP 550


# DIRECTIONAL PARABOLIC DISH ANTENNA WITH TWISTPORT™ CONNECTOR

UltraDish™ TP 550's are designed for CPE or PtP connections. The antenna reflector is made from an aluminum alloy to ensure a very uniform shape. Our virtually lossless TwistPort™ connector guarantees easy radio deployment and maintenance.

Antenna installation is extremely easy and ensures rapid deployment for large scale projects. Our innovative antenna mount fits a wide range of pole diameters and can be easily swapped for right or left side mounts. A single HEX tool is all you need to perform your installation.



#### Elevation Pattern H Gain H Azimuth Pattern H 30 28 26 24 20 18 16 14 12 10 120 120 120 120 8 6

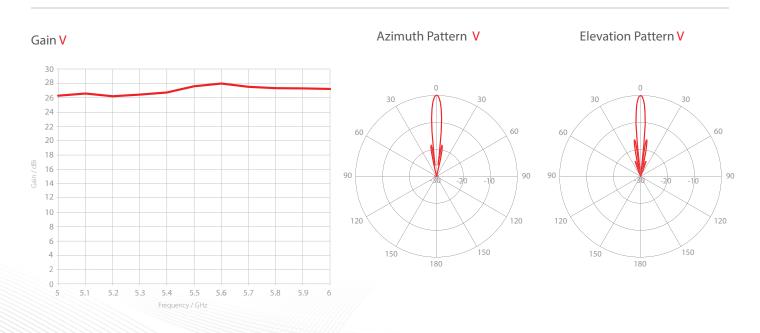

5.1

5.2 5.3

5.4

5.5

Frequency / GHz

5.7

5.8

5.9

# **Product Datasheet**



### **PHYSICAL**

Antenna Connection	TwistPort™ - Quick Locking Waveguide Port
Antenna Type	Parabolic Dish
Enviromental	IP65
Pole Mounting Diameter	15-86 mm
Temperature	-40 to +60 °C (-40°F to +140°F)
Wind Survival	160 Km/h
Weight	3.7 Kg / 8 lbs* – single unit N/A Kg / lbs – single unit incl. package
Single Unit	Retail Box: N/A

 $<sup>\</sup>hbox{\tt\#Estimation based on pre-production units. Subject to change}.$ 

### **COMPATIBLE WIRELESS PLATFORMS**

any TwistPort™ Adaptor

any SIMPER™ Radio

# PRODUCT DIMENSIONS



Gain	27.5 dBi
Azimuth Beam Width -6 dB	H 8° / V 8.5°
Elevation Beam Width -6 dB	H 8.5° / V 8°
Azimuth Beam Width -3 dB	H 6°/V 6.5°
Elevation Beam Width -3 dB	H 6.5° / V 6°
Front-to-Back Ratio (Min)	37 dB

