

EBC SERIES AUTOMATIC 7 STAGE BATTERY CHARGER WITH LED




Features: ■

- 7 stage battery charger ▶
- Two groups of charging output ▶
- Power ON/OFF switch ▶
- AC Input Voltage Range Selectable : 90~165V / 190~265V ▶
- Protections : short circuit, overload, over-temperature, reverse polarity (fuse) ▶
- Temperature Sensor: optional ▶
- Simple operations and maintenance ▶
- Silent cooling fan operation ▶
- Automatic 7 stage charging: desulphation, soft start bulk, absorption, battery test, recondition and float ▶

Plug Type (optional)



■ 7-STAGE CHARGING DIAGRAM

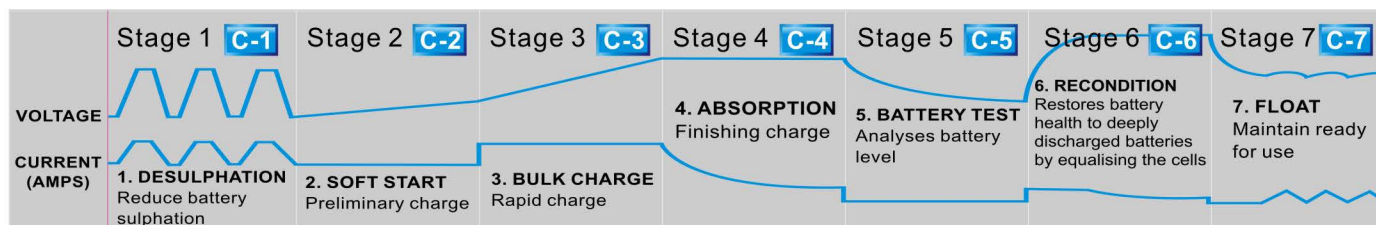

■ Specification:

Model	EBC1210	EBC2405	EBC1220	EBC2410
Input Voltage	AC220V(190-265V)			
Output Voltage	DC12V	DC24V	DC12V	DC24V
Max.charging current	10A	5A	20A	10A
Suggested Battery Capacity	15-100Ah		25-200Ah	
Bulk/absorption Charging	14.2V/14.6V/14.8V DC selectable(12V)		28.4V/29.2V/29.6V DC selectable(24V)	
Floating Charging	13.2V/13.5V/13.8V DC selectable(12V)		26.4V/27.0V/27.6V DC selectable(24V)	
Protection Function	Reverse polarity, output short-circuit, over current,over voltage,overload, over heat			
Charging way	Automatic 7 stage charging: Desulphation, soft start, bulk,absorption, battery test, recondition and float			
LED display	(U-I-C-P)Battery voltage, output current, charge status,overheat protection			
Battery type	All rechargeable lead acid battery			
Operating Temperature	0-40℃			
Ventilation	Cooling fan;By thermal¤t control			
DIMENSION	17.6*17.5*9. 5cm (L*W*H)			
N.W/UNIT	1310g			
QTY/Ctn	6 pcs/box. 42.5*29*37.5cm			
G.W./Ctn	12kg			
Certification	CE.RoHS.SONCAP			